


**Estimated outline



ARTECH
ARCHITECTURE
& INTERIORS
ARTECH DESIGN GROUP, INC.
1410 CHURCH STREET
P.O. BOX 100
PIGEON FORGE, TN 37688
423.266.4313


STRUCTURAL NOTES:

1. 'X' MARK INDICATES TOP OF FOOTING ELEVATION BELOW FINISH FLOOR ELEVATION
2. ALL FOOTINGS SHALL BE CENTERED UNDER COLUMNS AND BEAM BEARING WALL REINFORCEMENTS U.N.O.
3. SEE SHEET S2.1 FOR ADDITIONAL SECTIONS AND DETAILS
4. ALL SECTIONS TYP. U.N.O.
5. VERIFY ALL MASONRY OPENINGS W/ARCH DWGS
6. ALL MASONRY WALLS SHALL BE ADEQUATELY SUPPORTED BY TEMPORARY BRACING DURING CONSTRUCTION AND BACKFILLING. BRACING SHALL REMAIN IN PLACE UNTIL ALL FLOOR AND ROOF CONNECTIONS ARE COMPLETE
7. FOR TYPICAL PLASTER SEE DSS.1
WALL SIZE, BAR SIZE AND SPACING ARE INDICATED AS SHOWN BELOW:



STRUCTURAL LEGEND:

- (F) COLUMN/FOOTING DESIGNATION - SEE COLUMN/FOOTING SCHEDULE ON S2.1
- NON-LOAD BEARING WALLS
- LOAD BEARING CMU WALL - W/REQUIRED PLASTER LOCATIONS INDICATED. SPACE OTHER PLASTER AS INDICATED ON PLAN - SEE NOTE 7 & DETAIL ES2.1
- C-1 TYPICAL MASONRY CONTROL JOINT SEE DETAIL FS2.1 C-1 HAS 30" MIN. MAX.
- C-2 TYPICAL SLAB CONTROL OR CONSTRUCTION JOINT - SEE SECTION 4.5 OR S2.1
- TYPICAL MASONRY CORNER PLASTER SEE DETAIL ES2.1
- (2)5 x 2' 0" I.G. CENTERED IN SLAB TYP. ALL MSRY DOOR OPENINGS
- TYPICAL BEAM BEARING LOCATION - SEE 6 OR 10S2.2
- INDICATES STEPPED FOOTING - STEP PER AS2.1

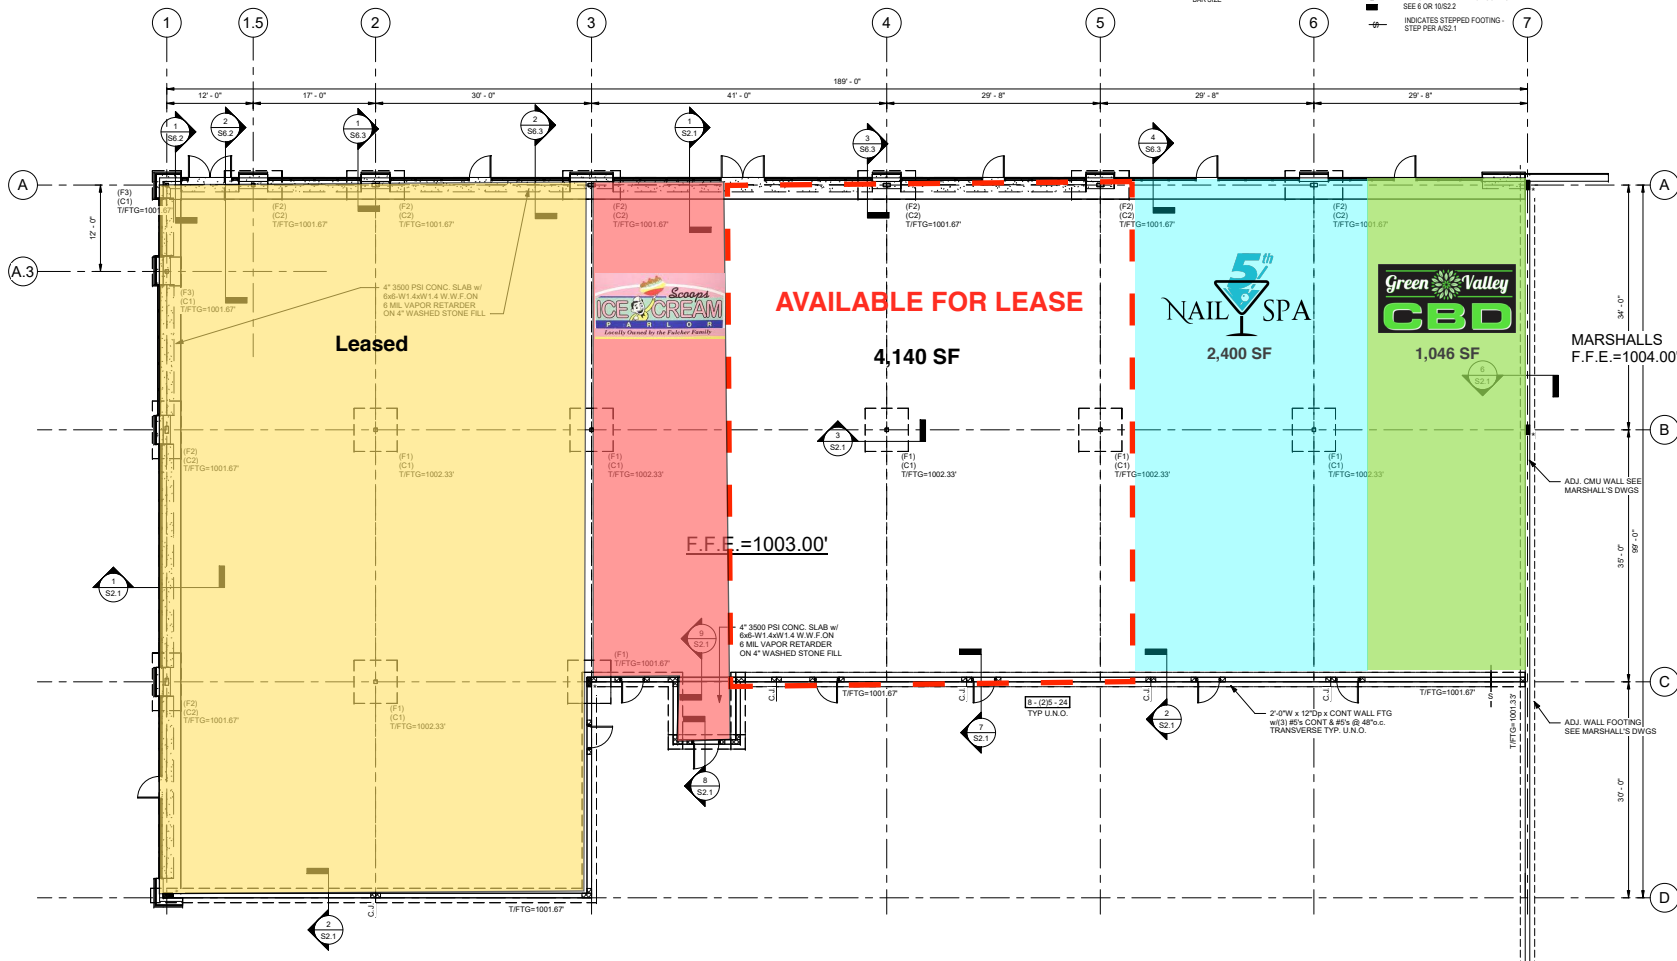

Shops A Shell
Riverwalk
Teaster Lane at Jake Thomas Blvd.
Pigeon Forge, TN

SITE Huston
REAL ESTATE DEVELOPMENT CONSTRUCTION



ISSUE DATES
INITIAL ISSUE 06/13/19

JOB NO. #16-024 | D/WN BSB | C/D BH

S1.1
FOUNDATION PLAN